



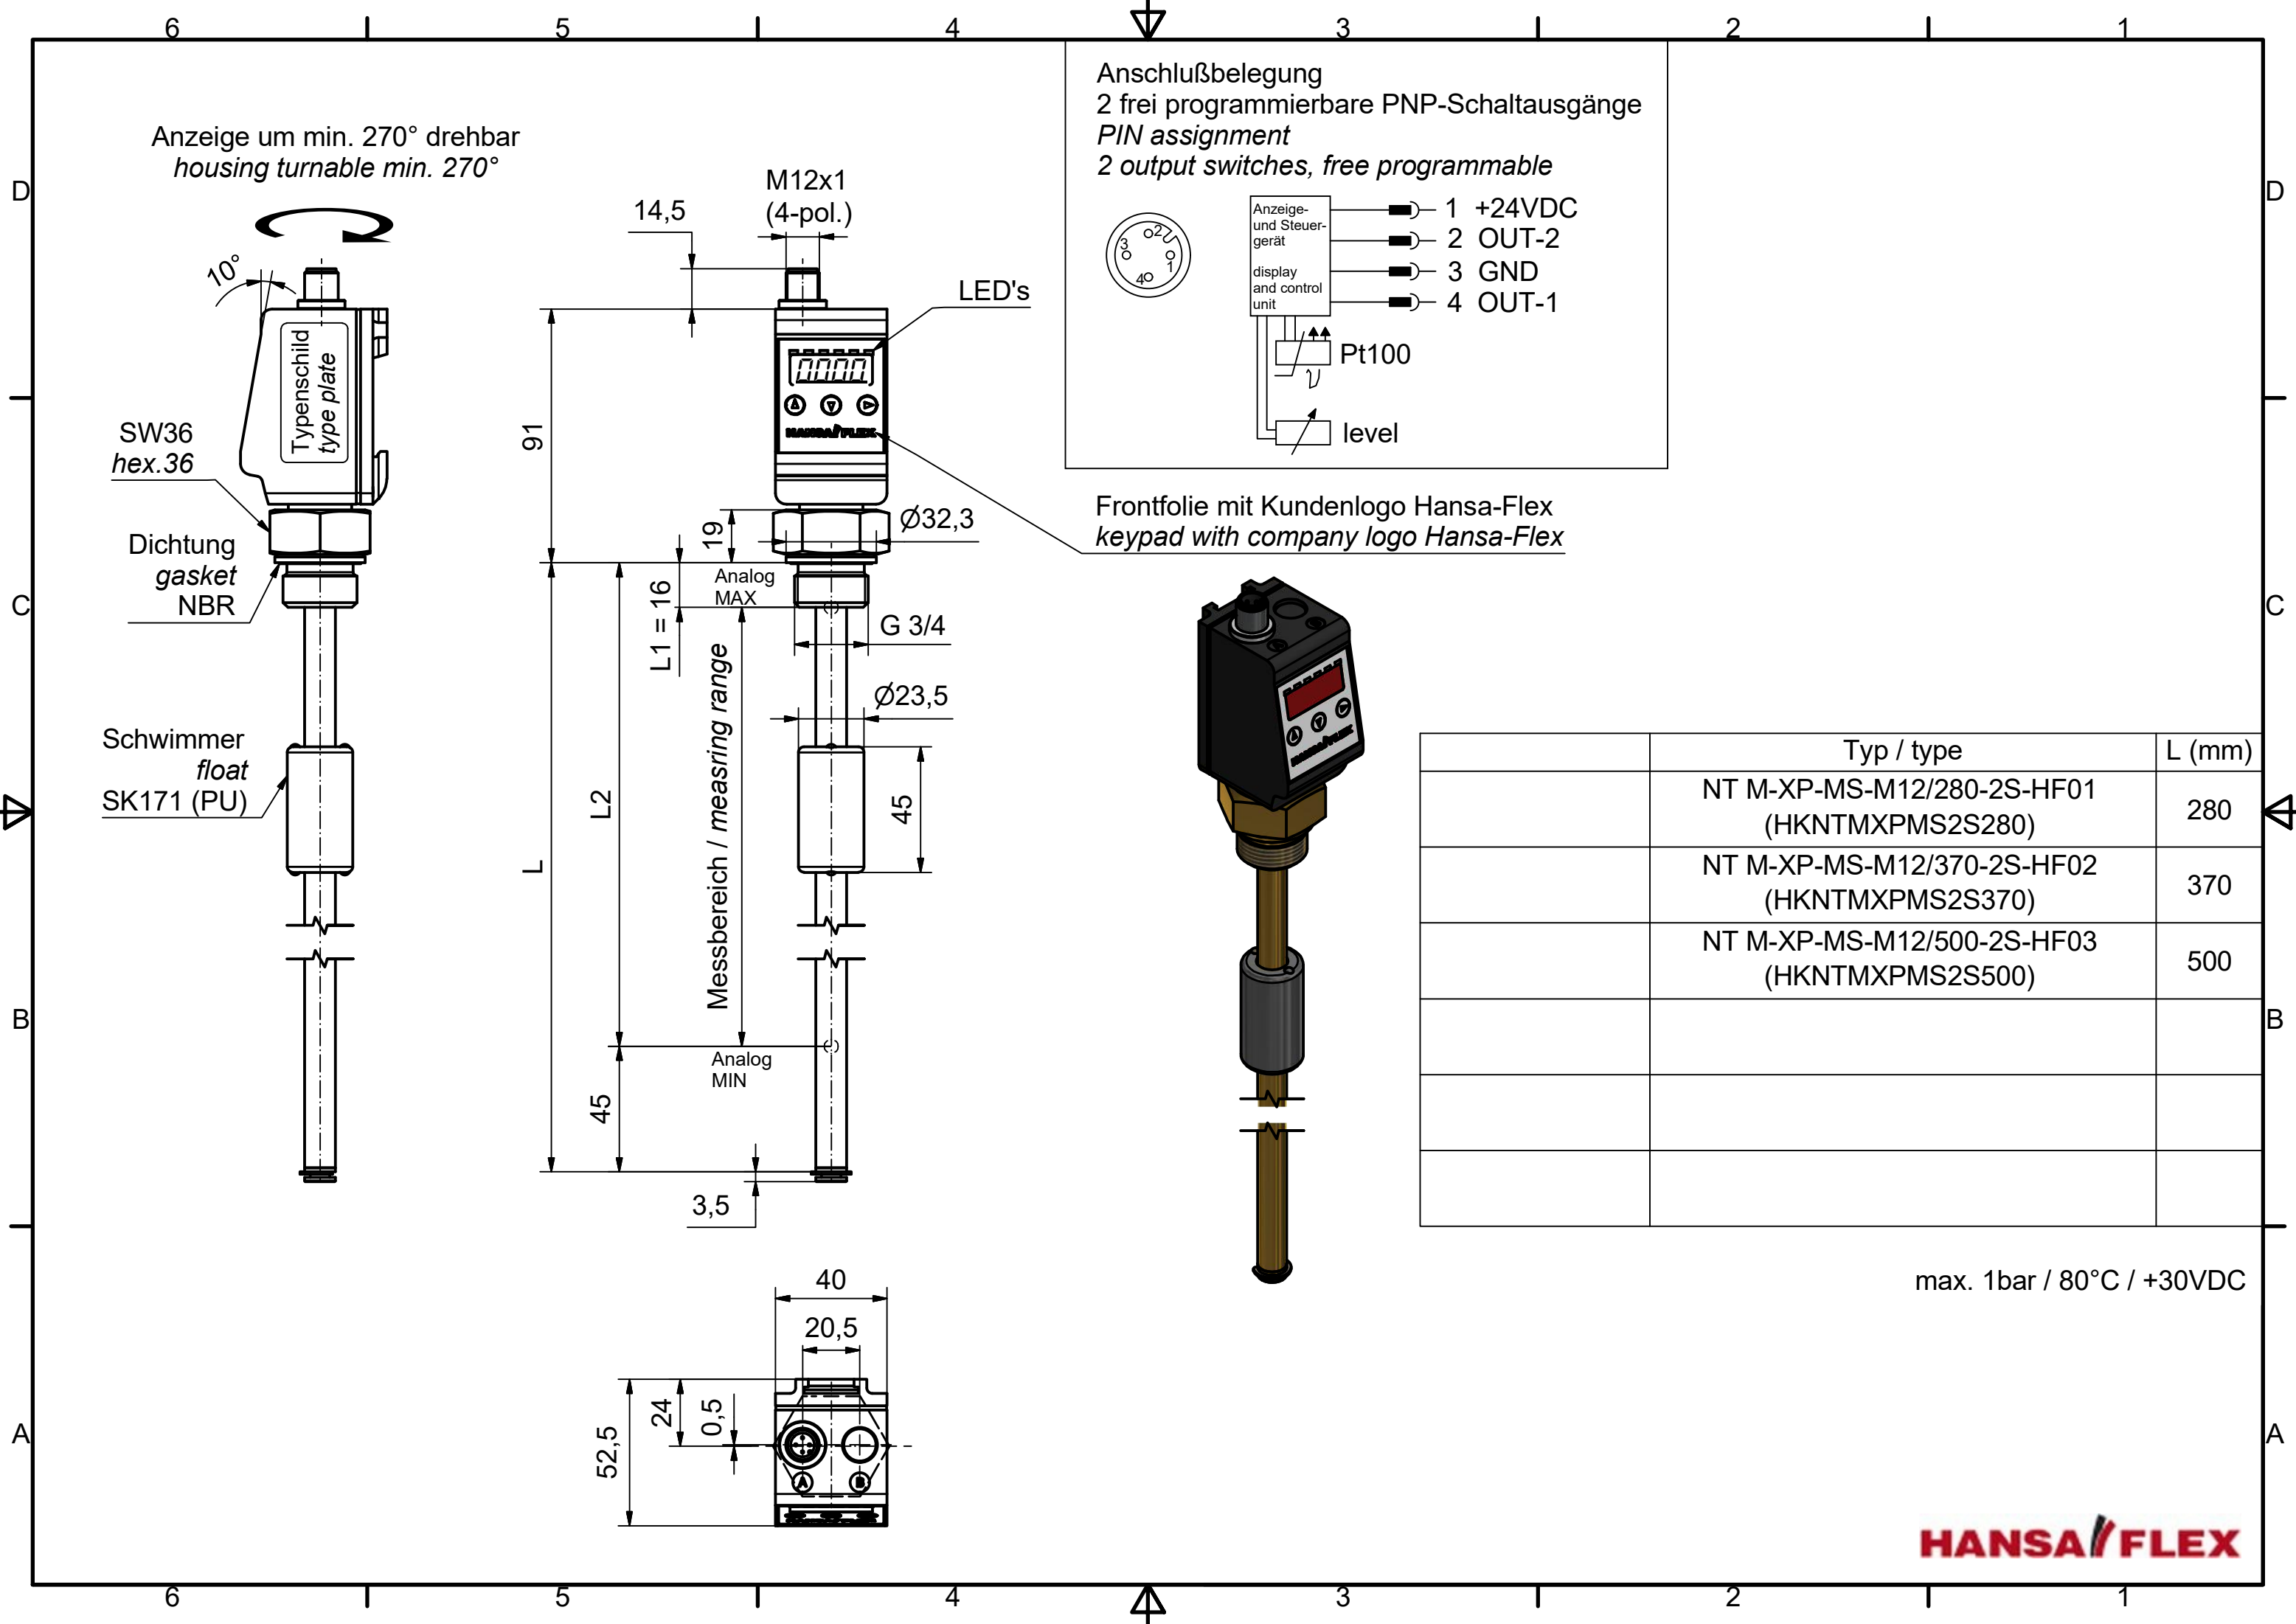


Anzeige um min. 270° drehbar
housing turnable min. 270°


SW36
hex.36

Dichtung
gasket
NBR


Schwimmer
float
SK171 (PU)

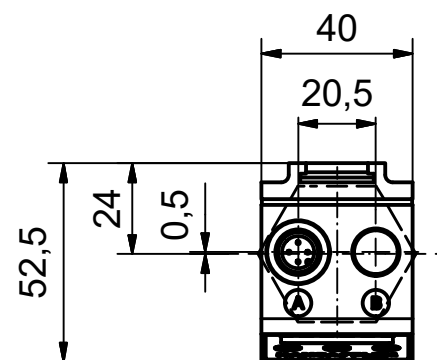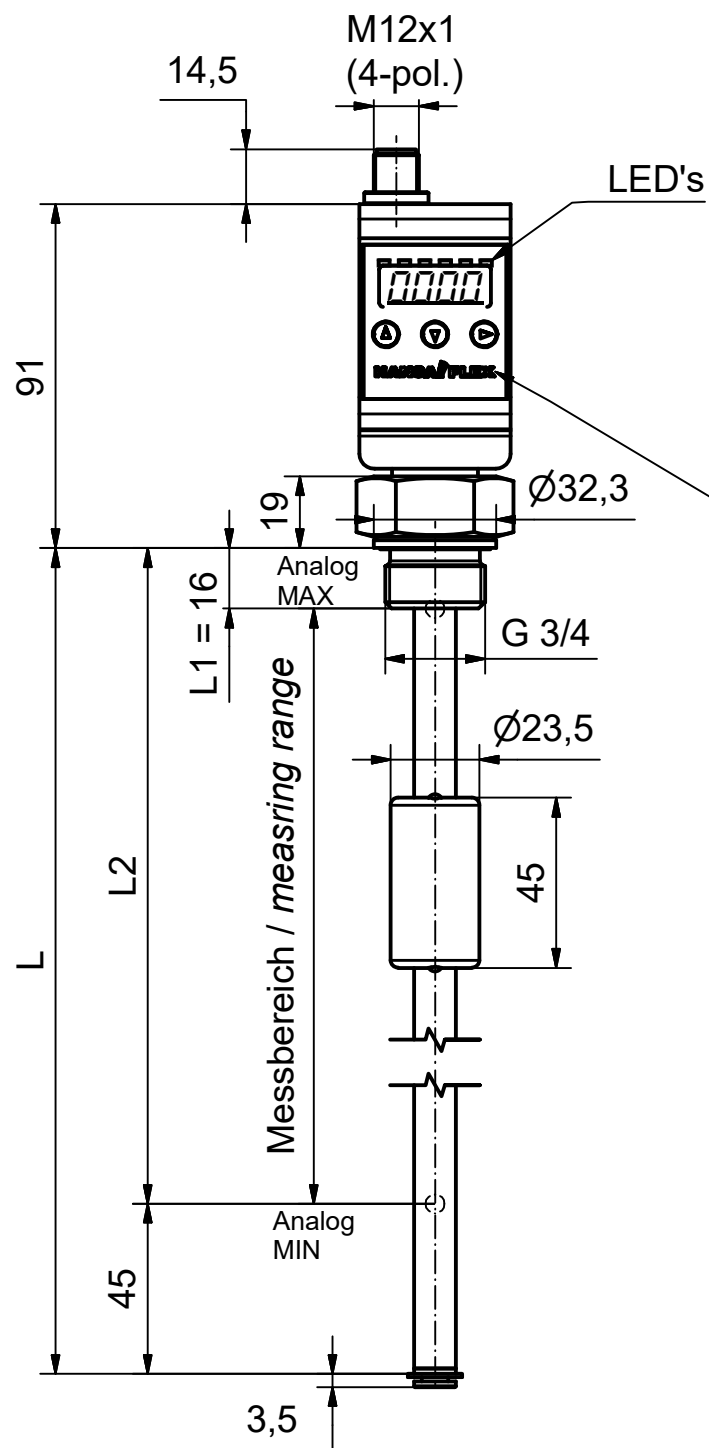

Anschlußbelegung
2 frei programmierbare PNP-Schaltausgänge
PIN assignment
2 output switches, free programmable

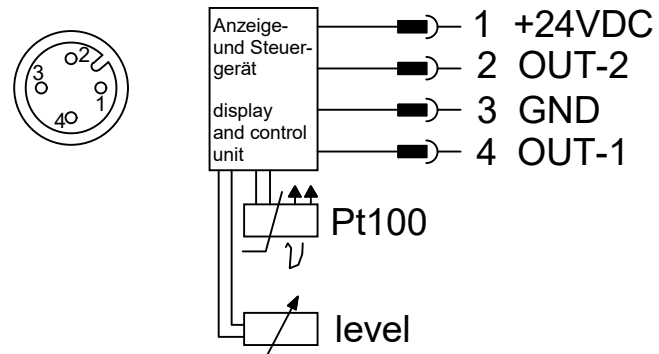

Frontfolie mit Kundenlogo Hansa-Flex
keypad with company logo Hansa-Flex

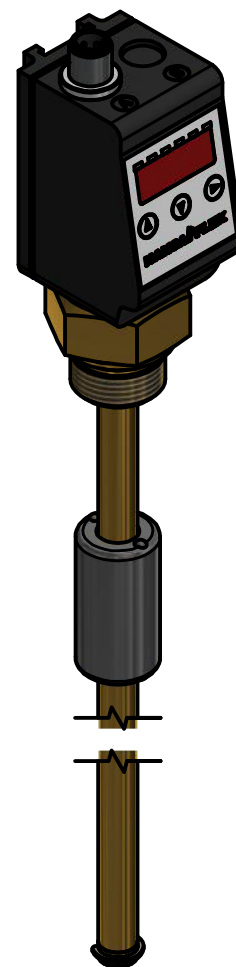

	Typ / type	L (mm)
	NT M-XP-MS-M12/280-2S-HF01 (HKNTMXPMS2S280)	280
	NT M-XP-MS-M12/370-2S-HF02 (HKNTMXPMS2S370)	370
	NT M-XP-MS-M12/500-2S-HF03 (HKNTMXPMS2S500)	500

max. 1bar / 80°C / +30VDC

HANSA FLEX